



## Diesel Generator Set

# mtu 6R0120 DS150

150 kW/60 Hz/Standby/208 - 600V

Reference **mtu 6R0120 DS150** (135 kW) for Prime Rating Technical Data

### System ratings

| Voltage (L-L)        | 240V †                     | 240V †       | 208V †       | 240V †           | 380V †       | 480V †       | 600V         |
|----------------------|----------------------------|--------------|--------------|------------------|--------------|--------------|--------------|
| Phase                | 1                          | 1            | 3            | 3                | 3            | 3            | 3            |
| PF                   | 1                          | 1            | 0.8          | 0.8              | 0.8          | 0.8          | 0.8          |
| Hz                   | 60                         | 60           | 60           | 60               | 60           | 60           | 60           |
| kW                   | 150                        | 150          | 150          | 150              | 150          | 150          | 150          |
| kVA                  | 150                        | 150          | 187          | 187              | 187          | 187          | 187          |
| Amps                 | 625                        | 625          | 520          | 451              | 285          | 226          | 180          |
| skVA@30% voltage dip | 188                        | 196          | 296          | 296              | 282          | 394          | 316          |
| Generator model      | 43ICSL6206                 | 43IPSL6224   | 43ICSL6202   | 43ICSL6202       | 43ICSL6204   | 43ICSL6202   | 43IPSL6240   |
| Temp rise            | 130 °C/40 °C               | 130 °C/40 °C | 130 °C/40 °C | 130 °C/40 °C     | 130 °C/40 °C | 130 °C/40 °C | 130 °C/40 °C |
| Connection           | 12 LEAD<br>DOUBLE<br>DELTA | 4 LEAD       | 12 LEAD WYE  | 12 LEAD<br>DELTA | 12 LEAD WYE  | 12 LEAD WYE  | 4 LEAD WYE   |

† UL 2200 offered

### Certifications and standards

- Emissions
  - EPA Tier 3 certified
  - South Coast Air Quality Management District (SCAQMD)
- Generator set is designed and manufactured in facilities certified to standards ISO 9001:2008 and ISO 14001:2004
- Seismic certification – optional
  - 2021 IBC certification
  - HCAI pre-approval
- Power rating
  - Accepts rated load in one step per NFPA 110
- UL 2200 – optional (refer to *System ratings* for availability)
- CSA – optional
  - CSA C22.2 No. 100
  - CSA C22.2 No. 14
- CE marking provided
- Performance Assurance Certification (PAC)
  - Generator set tested to ISO 8528-5 for transient response
  - Verified product design, quality and performance integrity
  - All engine systems are prototype and factory tested

## Standard features\*

- Single source supplier
- Global product support
- Two (2) Year/3,000 Hour Basic Limited Warranty
- OM926LA diesel engine
  - 7.2 liter displacement
  - 4-cycle
- Engine-generator resilient mounted
- Complete range of accessories
- Cooling system
  - Integral set-mounted
  - Engine-driven fan
- Generator
  - Brushless, rotating field generator
  - 2/3 pitch windings
  - 300% short circuit capability with optional Permanent Magnet Generator (PMG)
- Digital control panel(s)
  - UL recognized, CSA certified, NFPA 110
  - Complete system metering
  - LCD display

## Standard equipment\*

### Engine

- Air cleaner
- Oil pump
- Oil drain extension and shut-off valve
- Full flow oil filter
- Fuel filter with water separator
- Jacket water pump
- Thermostat
- Blower fan and fan drive
- Radiator - unit mounted
- Electric starting motor - 12V
- Governor - electronic isochronous
- Base - formed steel
- SAE flywheel and bell housing
- Charging alternator - 12V
- Battery box and cables
- Flexible fuel connectors
- Flexible exhaust connection
- EPA certified engine

### Generator

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting
- Self-ventilated and drip-proof
- Superior voltage waveform
- Solid state, volts-per-hertz regulator
- $\pm 1\%$  voltage regulation no load to full load
- Brushless alternator with brushless pilot exciter
- 4 pole, rotating field
- 130 °C standby temperature rise
- 1-bearing, sealed
- Flexible coupling
- Full amortisseur windings
- 125% rotor balancing
- 3-phase voltage sensing
- 100% of rated load - one step
- 5% maximum total harmonic distortion

### Digital control panel(s)

- Digital metering
- Engine parameters
- Generator protection functions
- Engine protection
- SAE J1939 Engine ECU Communications
- Windows®-based software
- Multilingual capability
- Communications to remote annunciator
- Programmable input and output contacts
- UL recognized, CSA certified, CE approved
- Event recording
- IP 54 front panel rating with integrated gasket
- NFPA 110 compatible

## Application data

### Engine

|                                    |                 |
|------------------------------------|-----------------|
| Manufacturer                       | Mercedes-Benz   |
| Model                              | OM926LA         |
| Type                               | 4-cycle         |
| Arrangement                        | 6-inline        |
| Displacement: L (in <sup>3</sup> ) | 7.2 (439)       |
| Bore: cm (in)                      | 10.6 (4.17)     |
| Stroke: cm (in)                    | 13.6 (5.35)     |
| Compression ratio                  | 17.5:1          |
| Rated rpm                          | 1,800           |
| Engine governor                    | MR2 / CPC4-ECAN |
| Maximum power: kWm (bhp)           | 247 (331)       |
| Steady state frequency band        | ± 0.25%         |
| Air cleaner                        | dry             |

### Liquid capacity

|                                       |            |
|---------------------------------------|------------|
| Total oil system: L (gal)             | 29 (7.7)   |
| Engine jacket water capacity: L (gal) | 10 (2.6)   |
| System coolant capacity: L (gal)      | 24.1 (6.4) |

### Electrical

|                                          |     |
|------------------------------------------|-----|
| Electric volts DC                        | 12  |
| Cold cranking amps under -17.8 °C (0 °F) | 950 |
| Batteries: group size                    | 31  |
| Batteries: quantity                      | 1   |

### Fuel system

|                                |              |
|--------------------------------|--------------|
| Fuel supply connection size    | -6 JIC       |
| Fuel supply hose size          | 3/8" ID      |
| Fuel return connection size    | -6 JIC       |
| Fuel return hose size          | 3/8" ID      |
| Maximum fuel lift: m (ft)      | 2.6 (8.5)    |
| Recommended fuel               | diesel #2    |
| Total fuel flow: L/hr (gal/hr) | 330.5 (87.3) |

### Fuel consumption\*

|                                        |             |
|----------------------------------------|-------------|
| At 100% of power rating: L/hr (gal/hr) | 40.5 (10.7) |
| At 75% of power rating: L/hr (gal/hr)  | 30 (7.9)    |
| At 50% of power rating: L/hr (gal/hr)  | 20.4 (5.4)  |

\* Based on 431CSL6202 480 volt generator set

### Cooling - radiator system

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Ambient capacity of radiator: °C (°F)                             | 50 (122)     |
| Maximum restriction of cooling air:                               |              |
| intake and discharge side of radiator: kPa (in. H <sub>2</sub> O) | 0.12 (0.5)   |
| Water pump capacity: L/min (gpm)                                  | 143 (37)     |
| Heat rejection to coolant: kW (BTUM)                              | 77.8 (4,424) |
| Heat rejection to air to air: kW (BTUM)                           | 50.8 (2,889) |
| Heat radiated to ambient: kW (BTUM)                               | 29.4 (1,672) |
| Fan power: kW (hp)                                                | 15.6 (22.1)  |

### Air requirements


|                                                                                                                                                       |              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Aspirating: *m <sup>3</sup> /min (SCFM)                                                                                                               | 13.4 (473)   |
| Air flow required for radiator                                                                                                                        |              |
| cooled unit: *m <sup>3</sup> /min (SCFM)                                                                                                              | 408 (14,408) |
| Remote cooled applications; air flow required for dissipation of radiated generator set heat for a maximum of 25 °F rise: *m <sup>3</sup> /min (SCFM) | 107 (3,779)  |

\* Air density = 1.184 kg/m<sup>3</sup> (0.0739 lbm/ft<sup>3</sup>)

### Exhaust system

|                                                                                                |              |
|------------------------------------------------------------------------------------------------|--------------|
| Gas temperature (stack): °C (°F)                                                               | 434 (813)    |
| Gas volume at stack temperature: m <sup>3</sup> /min (CFM)                                     | 39.1 (1,381) |
| Maximum allowable back pressure at outlet of engine, before piping: kPa (in. H <sub>2</sub> O) | 10.5 (42)    |

Weights and dimensions

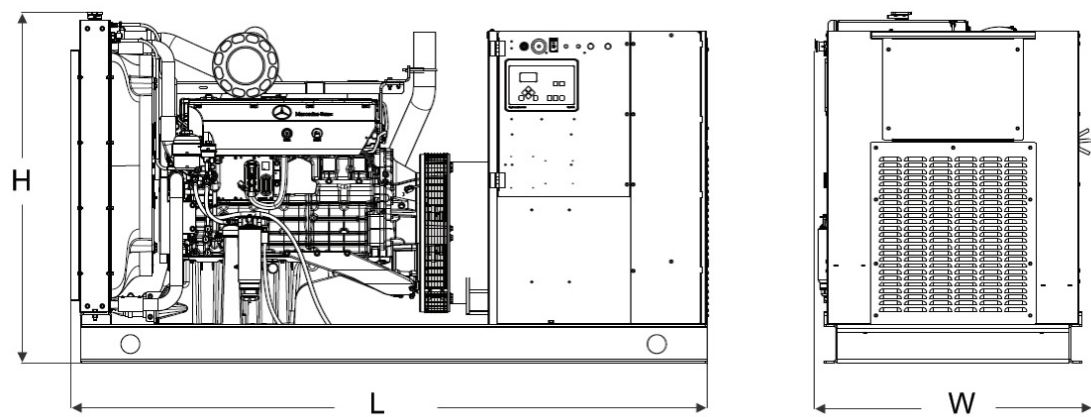

Drawing above for illustration purposes only, based on standard open power 480 volt generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

| System                | Dimensions (L x W x H)                          | Weight                          |
|-----------------------|-------------------------------------------------|---------------------------------|
| Open Power Unit (OPU) | 2,580 x 1,121 x 1,422 mm (101.6 x 44.1 x 56 in) | 1,632-2,120 kg (3,598-4,674 lb) |

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific generator set.

Sound data

| Unit type            | Standby full load |
|----------------------|-------------------|
| Level 0 (OPU): dB(A) | 88.7              |

Sound data is provided at 7 m (23 ft). Generator set tested in accordance with ISO 8528-10 and with infinite exhaust.

Emissions data

| NO <sub>x</sub> + NMHC | CO  | PM   |
|------------------------|-----|------|
| 3.93                   | 1.2 | 0.06 |

— All units are in g/hp-hr and shown at 100% load (not comparable to EPA weighted cycle values). Emission levels of the engine may vary with ambient temperature, barometric pressure, humidity, fuel type and quality, installation parameters, measuring instrumentation, etc. The data was obtained in compliance with US EPA regulations. The weighted cycle value (not shown) from each engine is guaranteed to be within the US EPA standards.

Rating definitions and conditions

- Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 3046-1, BS 5514, and AS 2789. Average loadfactor: ≤ 85%.
- Nominal ratings at standard conditions: 25 °C and 300 meters (77 °F and 1,000 feet).
- Deration factor:
  - Consult your local **mtu** Distributor for altitude derations.
  - Consult your local **mtu** Distributor for temperature derations.